

DHA 90-4121-005

Enhanced Sunlight Readable & NVIS Compatible Display Head Assembly

GENERAL SPECIFICATIONS

Display Diagonal Size 12.1" (307.34 mm)

Resolution 1024 x 768 (XGA)

Aspect Ratio 4:3

Refresh Rate 60 Hz

Contrast Ratio 700:1

Weber Contrast 9.7:1

Display Colors 16.7M

Color Gamut 70% NTSC

LCD Technology Si TFT Active Matrix

Response Time (R/F) 35 ms

Horizontal Viewing Angle $\pm 80^\circ$

Vertical Viewing Angle $\pm 80^\circ$

ELECTRICAL SPECIFICATIONS

LCD Interface LVDS

LCD Voltage 3.3 VDC

LCD Maximum Power 1.95 W

BACKLIGHT SPECIFICATIONS

Maximum Brightness 1850 cd/m²

Maximum Power 10.5 W

Uniformity 75%

LED Driver 21-500 (recommended)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -30°C to 85°C

Storage Temperature -30°C to 85°C

RELIABILITY

Shock 50 G, 20 ms, 1/2 Sine Wave

Vibration 1.5 G (10–200 Hz)

NVIS SPECIFICATIONS

MIL-STD-3009 NVIS White

MIL-STD-3009 Radiance Class B

SPECIAL FEATURES

TYPE

DESCRIPTION

Dual Mode High brightness and NVIS-compatible backlight modes

Military Grade Extended operating and storage temperature range

Long product life cycle with end of life support

Superior resistance to shock and vibration

Configuration control

LCD Value-Add All LCD value-add (excluding LCD) under General Digital's direct control, including P-Frame, LCD bezel and enclosure, light guide and optical films



The 90-4121-005 12.1" display has been optically enhanced to meet specialized needs.

Weber Contrast vs Power

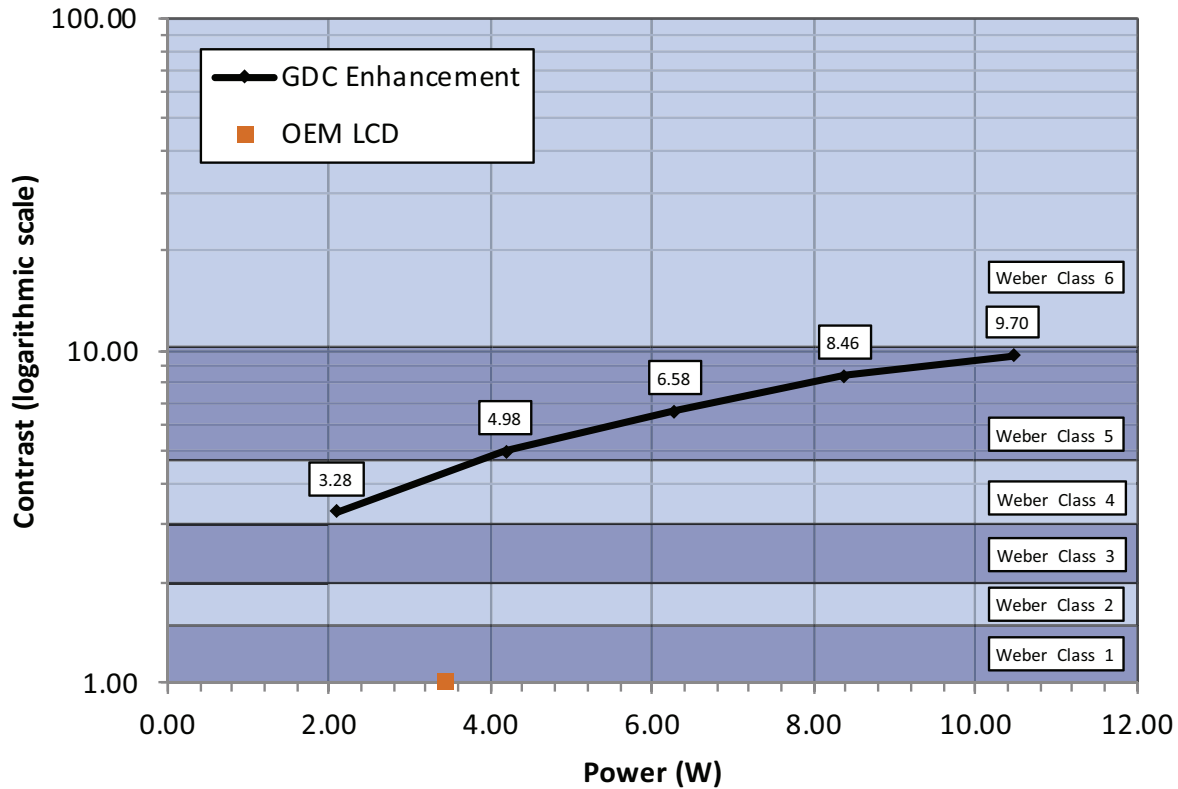


Figure 1: Weber Contrast vs Power (reference Notes 1, 3, 4 on page 3)

WHAT IS WEBER CONTRAST?

Weber contrast is an important attribute to consider when selecting a display for use in high ambient brightness environments. Unlike the standard contrast value, which is measured in ideal conditions (dark room), the Weber contrast is measured under the simulated effects of direct sunlight (10,000 fc direct and 2,000 fL Lambertian light sources). General Digital determines and records the Weber contrast using the test procedure described in MIL-L-85762A. To simplify and quantify the engineering challenge of qualifying a panel for use in high ambient brightness conditions, we created our own unique metric (Weber Class), which is derived directly from Table II of MIL-L-85762A. This data establishes that the larger the Weber Class number, the better the display will perform in high ambient brightness conditions.

WEBER CONTRAST LOOKUP CHART

DISPLAY CLASS	CONTRAST RANGE	SHORT DESCRIPTION	IDEAL APPLICATIONS
Class 1	0.00 to 1.49	Not sunlight readable	Not suitable for direct sunlight use
Class 2	1.50 to 1.99	Numeric only	Useful for numerics only in direct sunlight
Class 3	2.00 to 2.99	Alphanumeric	Useful for characters and numerical data
Class 4	3.00 to 4.659	Graphic symbols and alphanumerics	Useful for characters, numerical data and static images
Class 5	4.66 to 10.29	Acceptable video performance	Useful for characters, numerical data, static images and low quality video (6 $\sqrt{2}$ shades of gray with counting off as 1)
Class 6	10.3 and higher	Best case video performance	Useful for characters, numerical data, static images and high quality video (eight or more $\sqrt{2}$ shades of gray with counting off as 1)

Temperature & Brightness vs Power

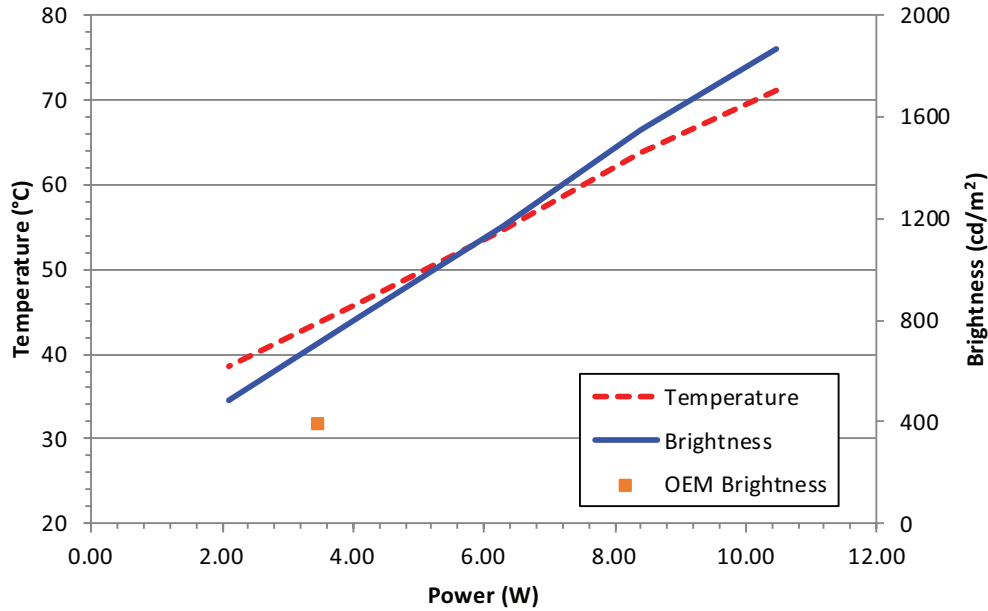


Figure 2: LCD Temperature and Brightness vs Backlight Power (reference Notes 1, 2)

CIE 1931 Color Space

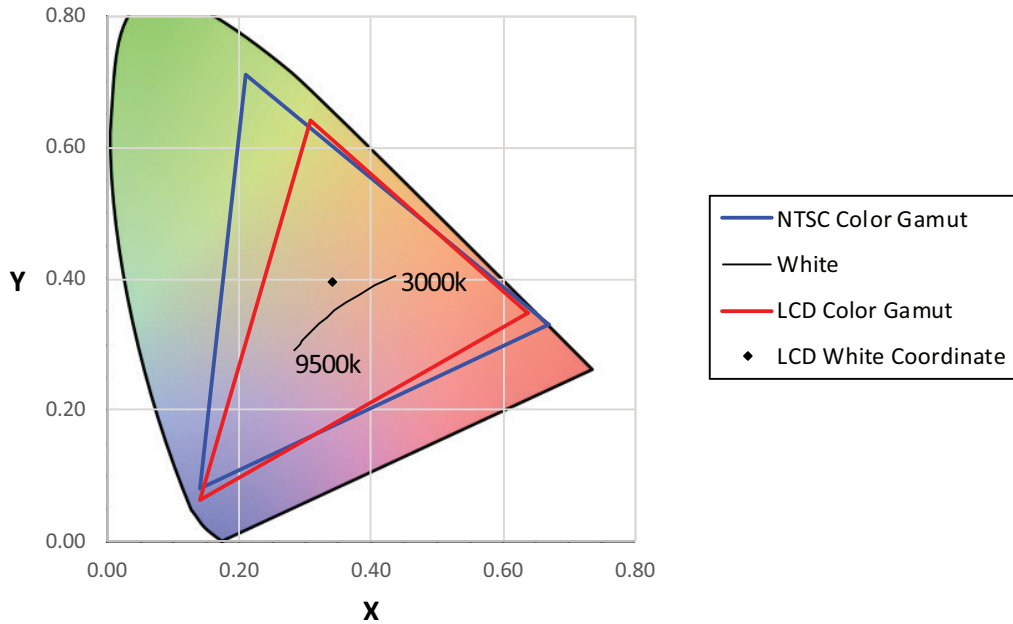


Figure 3: LCD RGB Color Coordinates Compared to NTSC Color Space (reference Notes 1, 3, 4)

NOTES

- 1) Data recorded at an ambient temperature of 25°C.
- 2) Temperature on rear panel on the center of the Day Mode LED Rail.
- 3) Weber Contrast calculated IAW MIL-L-85762A.
- 4) Measurements taken with antireflective film and ESR overlay.

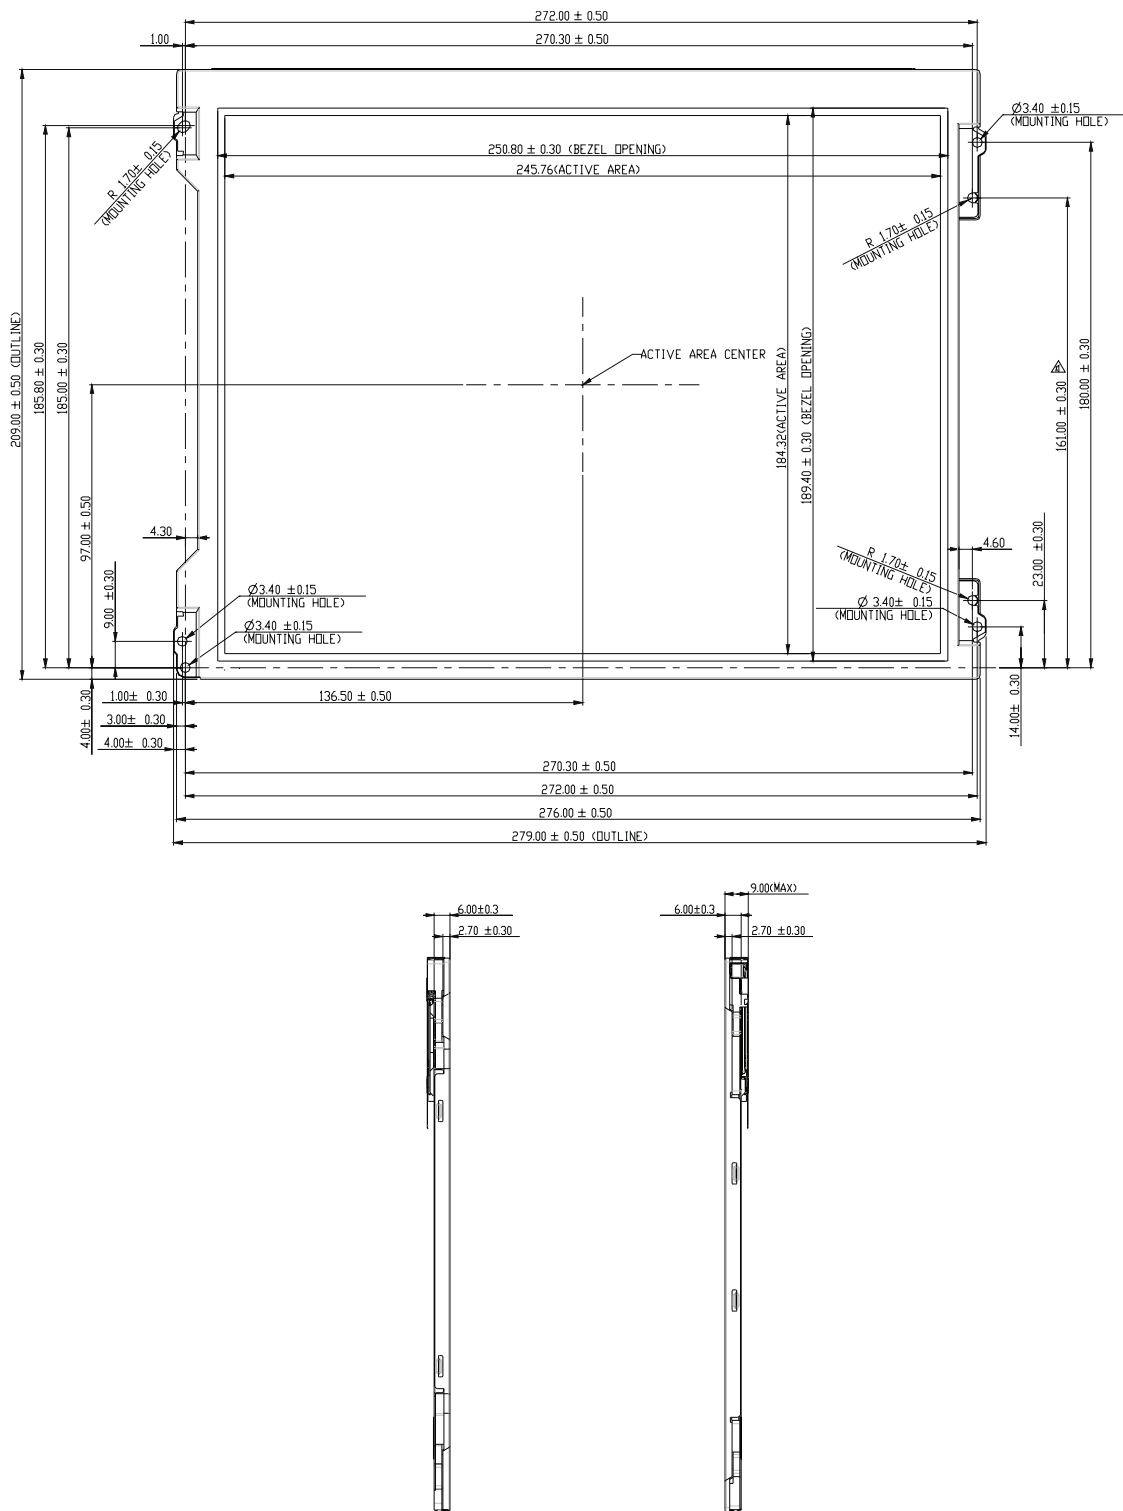


Figure 4: Display dimensions (unit of measure: mm; tolerance is ± 0.50 mm unless otherwise indicated)

MECHANICAL SPECIFICATIONS

Active Area	245.76 (W) x 184.32 (H) mm
Dimensional Outline	279 (W) x 209 (H) x 9 (D) mm
Weight	495 g

VALUE-ADD OPTIONS (Partial listing—contact General Digital for additional selections)

TYPE	EXAMPLES
Overlays	Touch screens, EMI filters, heaters, vandal shields, more
Overlay Integration	Optical bonding or mechanical mount
Films	AR (antireflective), AG (antiglare), AR/AG, privacy, contrast, hydrophobic, more
Controllers	Video, LED backlight, heater, touch, OSD, custom, more
Integration	Can be integrated into most General Digital standard products, or designed into custom assemblies
Software	Software/firmware development and IV&V (Independent Validation & Verification) services available

REVISION HISTORY

REV. NO.	ECN NO.	DATE	DESCRIPTION	INITIAL
0	—	14 Nov 2018	Created document	JDG
1	—	5 May 2020	Updated layout; added Reliability specifications	JDG



60 Prestige Park Road
East Hartford, Connecticut 06108
Phone 860.282.2900 | Toll-Free 800.952.2535
E-mail gdc_info@generaldigital.com

999-4121-005r1

DISCLAIMER

Information contained in this document is proprietary to General Digital Corporation and is current as of publication date. This document may not be modified in any way without the express written consent of General Digital. Product processing does not necessarily include testing of all parameters. General Digital reserves the right to change the configuration and performance of the product and to discontinue product at any time. **The appearance of U.S. Department of Defense (DoD) visual information does not imply nor constitute DoD endorsement.**

© 2020 General Digital Corporation. All rights reserved.
All product names are trademarks of their respective companies.