


**TABLE I - WIRE CONNECTIONS**

P1	P2	P3	Color	Signal
1	-	-	-	-
2	4	4	Black	Return
3	1	1	Red	+5 VDC
4	2	-	White	KB -
5	-	3	Green	TB +
6	3	-	Green	KB +
7	-	2	White	TB -
8	-	-	-	-
9	Shield	Shield	Bare	C. GND

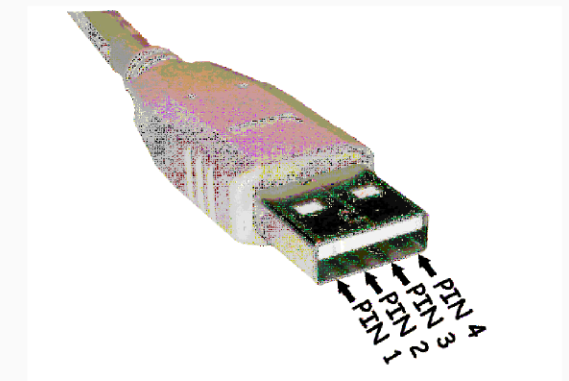

60 Prestige Park Road, East Hartford, CT 06108  
860.282.2900 www.GeneralDigital.com

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL DIGITAL AND IS NOT TO BE DISCLOSED, REPRODUCED OR PUBLISHED WITHOUT WRITTEN CONSENT FROM GENERAL DIGITAL. THIS DOCUMENT MUST BE RENDERED ILLEGIBLE WHEN BEING DISCARDED.

CABLE LENGTH	TOLERANCE	B	APPROVAL	DATE
<1"	± 1/16"		HD	09/14/20
1"-2"	± 1/8"		DRAWN	DATE
2"-18"	± 1/4"		MM	10/28/13
18"-72"	± 1/2"		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS NOTED IN CHART	
>72"	± 2%			

STANDARD CABLE DRAWING		
KBD/POINT, DE9S - DUAL USB TYPE A SOCKET, EXTERNAL CABLE		
FILE	DWG. NO.	REV
200-006-021-C	200-006-021	C
CAGE CODE	SHEET	
1JA77	1 OF 2	

**DO NOT SCALE DRAWING**