

## MIL-STD-3009 SUNLIGHT MEASUREMENT TEST SETUP

### TEST METHODOLOGY AND COMPARISON DATA ON GENERAL DIGITAL LCDs

In order to address the needs of display users in high ambient lighting conditions in both air traffic control towers and avionic cockpit applications, General Digital began performing optical enhancements on displays. It became necessary to establish a protocol for taking data that would allow comparison of displays, with each other and with differing film stacks. The data requirements take into consideration the FAA qualification tests and MIL-L-85762A (now MIL-STD-3009). Appropriate test equipment was engineered and verified by an outside testing lab (Hoffman Engineering).



MIL-L-85762A requires that the display (D) reflection properties be measured by a photometer (C) at an angle of  $30^\circ$  ( $\Theta_b$ ) to one side of the display normal and using two different light sources: one a high brightness light source (B) located on the display normal and the other a Lambertian source (A) located at the complementary  $30^\circ$  ( $\Theta_a$ ) angle.

The light source on the display normal access is intended to represent the effect of ambient light landing on the display surface. The level of the light from this source is adjusted by use of an independently calibrated white reflector (NIST traceable) placed on the same plane as the display under test at the intended measurement site. The white standard is then replaced by the display to be tested and the diffuse reflectance of the display surface is determined.

The light source -30 degrees from the display's normal axis is intended to represent the effect of the indirect sunlight that might strike the display. The level of the light from this source is adjusted by use of an calibrated (NIST traceable) mirror placed on the same plane as the display under test at the intended measurement site. The mirror is then replaced by the display to be tested and the lambertian reflectance is determined.


Once the white and black levels are determined as described, the viewability of the display is calculated by summing the two anticipated light levels (10,000 fc of light at the normal angle and 2,000 fL of light located at the complementary  $30^\circ$  angle) and then calculating the Weber contrast. This contrast is then compared to Table II in the MIL-L-85762A document to determine the display classification.

## WEBER CONTRAST LOOKUP CHART


Display Class	Contrast Range*	Short Description*	Ideal Applications
Class 1	0 to 1.49	Not sunlight readable	Not suitable for direct sunlight use
Class 2	1.5 to 1.99	Numeric ONLY	Useful for numerics only in direct sunlit
Class 3	2.0 to 2.99	Alphanumeric	Useful for characters and numerical data
Class 4	3.0 to 4.659	Graphic symbols and alphanumerics	Useful for characters, numerical data and static images
Class 5	4.66 to 10.29	Acceptable video performance	Useful for characters, numerical data, static images, and low quality video (6 $\sqrt{2}$ shades of gray with counting off as 1)
Class 6	10.3 and higher	Best case video performance	Useful for characters, numerical data, static images, and high quality video (8 or more $\sqrt{2}$ shades of gray counting off as 1)

\*This table created by General Digital. Contrast range and descriptions obtained from page 34 of MIL-L-85762A.

## DIAGRAM OF TEST SETUP

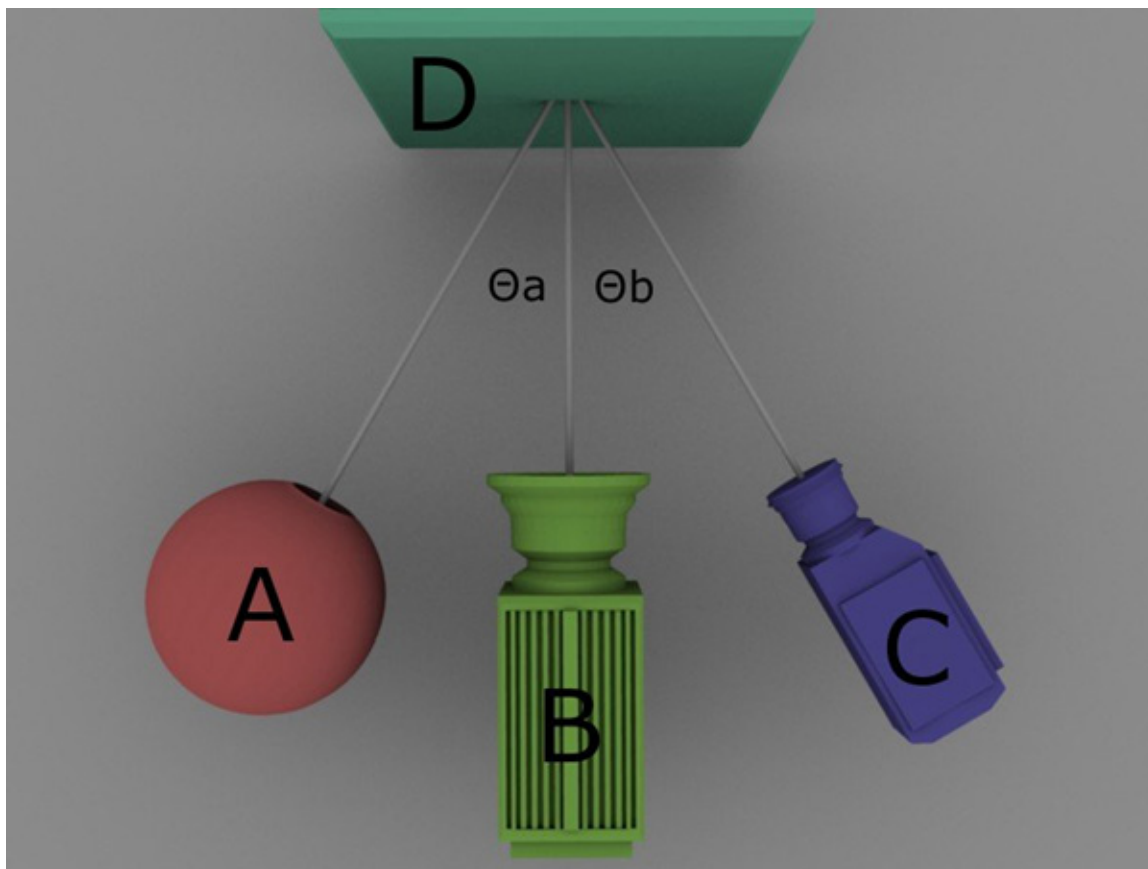

## PHOTO OF TEST SETUP

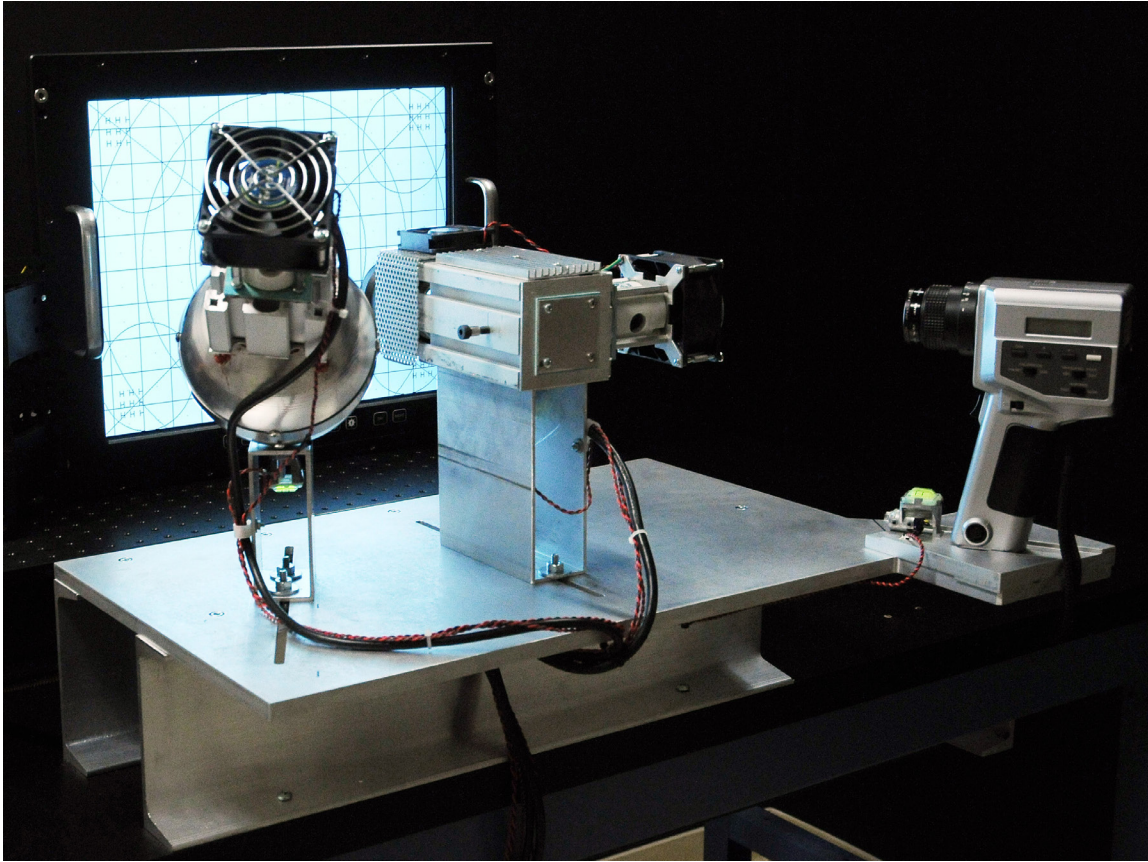

## TEST EQUIPMENT

Photometer: Minolta CS100  
Colorimeter: Minolta CS100  
Reflectometer: General Digital  
Video Source: TEAM VG819



60 Prestige Park Road

East Hartford, Connecticut 06108

Phone 860.282.2900 | Toll-Free 800.952.2535

E-mail [gdc\\_info@generaldigital.com](mailto:gdc_info@generaldigital.com)



### General Digital is an SBA Small Business Concern

Information contained in this document is proprietary to General Digital Corporation and is current as of publication date. This document may not be modified in any way without the express written consent of General Digital. Product processing does not necessarily include testing of all parameters. General Digital reserves the right to change the configuration and performance of the product and to discontinue product at any time.

© 2023 General Digital Corporation

All product names are trademarks of their respective companies.